



Basket Tray



Available in heights (H):

30

60

100

Dimension				Weight	L	Technical Info					Wire Ø			UL Certification	Code
W (B)				[Kg/m]	[mm]	Clip on base*	H [mm]	W [mm]	SWL [N/m 1,5m]	n° wires	03	25	40	UL suffix	
100	03	25	40	1,04	3000	—	108	102	433	2	3,90	3,90	4,00	UL	RV 003 1010
150	03	25	40	1,32	3000	—	108	152	441	2	4,30	4,30	4,40	UL	RV 003 1015
200	03	25	40	1,61	3000	—	108	202	462	4	4,30	4,30	4,40	UL	RV 003 1020
300	03	25	40	2,10	3000	n (1)	108	302	504	6	4,30/4,80	4,30/4,80	4,40/4,70	UL	RV 003 1030
400	03	25	40	2,71	3000	n (2)	108	402	546	8	4,60/4,80	4,60/4,80	4,70	UL	RV 003 1040
500	03	25	40	3,11	3000	n (2)	108	502	588	10	4,60/4,80	4,60/4,80	4,70	UL	RV 003 1050
600	03	25	40	3,53	3000	n (2)	108	602	630	12	4,60/4,80	4,60/4,80	4,70	UL	RV 003 1060

* To request UL certified material add the suffix
UL to the code - Ex: **RV 003 0606 25 UL**

* Quick joint clip on trays base Absent (-)

* Quick joint clip on trays base Present (n)

Rod pitch (mesh width): 50 mm (on the base B)

* **Usable sections see Assembly page**
(download Documents)

[RV 013 - wires version \(2 wires on the base\)](#)

Basket Tray

List of Coatings

 Hot dip galvanizing - UNI EN ISO 1461 Electrogalvanization - DIN 50962 Stainless steel AISI 304 - UNI EN 10088

1) Hot dip galvanized2) Stainless Steel AISI 304 / AISI 316L


1) Classified 8 – according to IEC 61537

Average Thickness of Zinc layer for HDG coatings ranges from 85 μm to 100 μm

2) Classified 9D – according to IEC 61537 corrosion resistance

Basket Tray

Load Diagram

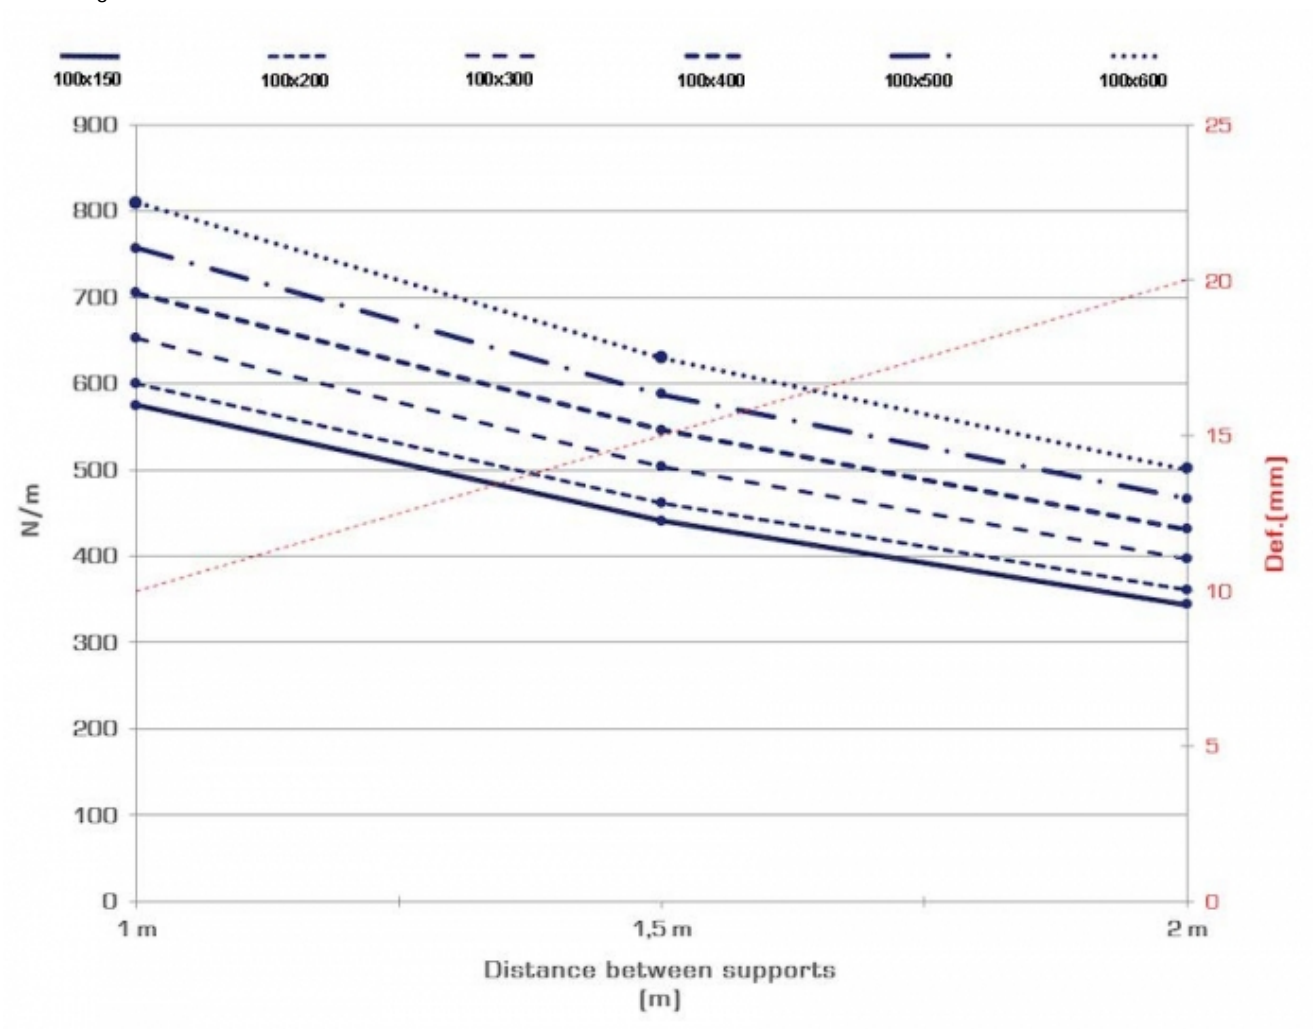

y= Max load (N/m)
x= Distance between supports (m)