


Basket Tray

For naval applications:

- H.30 - from B.100 to B.300
- H.60 - from B.100 to B.500

H.30 - Not UL certified

EASYCONNECT
BASKET TRAY



RV 003 0660

Length: 3000

Coatings

- 03 Hot dip galvanizing - UNI EN ISO 1461
- 25 Electro galvanization - DIN 50962
- 40 Stainless steel AISI 304 - UNI EN 10088

Technical Characteristics	
Dimension	
W (B)	600
Weight	
[Kg/m]	3,11
L	
[mm]	3000
Technical Info	
Clip on base*	n (2)
H [mm]	60
W [mm]	602
SWL [N/m 1,5m]	547
n° wires	12
Wire Ø	
03	4,60/4,80
25	4,60/4,80
40	4,70
UL Certification	
UL suffix	UL

* To request UL certified material add the suffix
UL to the code - Ex: **RV 003 0606 25 UL**

* Quick joint clip on trays base Absent (-)

* Quick joint clip on trays base Present (n)

Basket Tray

Rod pitch (mesh width): 50 mm (on the base B)

*** Usable sections see Assembly page
(download Documents)**

[RV 013 - wires version \(2 wires on the base\)](#)

1) Hot dip galvanized

2) Stainless Steel AISI 304 / AISI 316L

1) Classified 8 – according to IEC 61537

Average Thickness of Zinc layer for HDG coatings ranges from 85 µm to 100 µm


2) Classified 9D – according to IEC 61537 corrosion resistance

Certifications



Basket Tray

Load Diagram

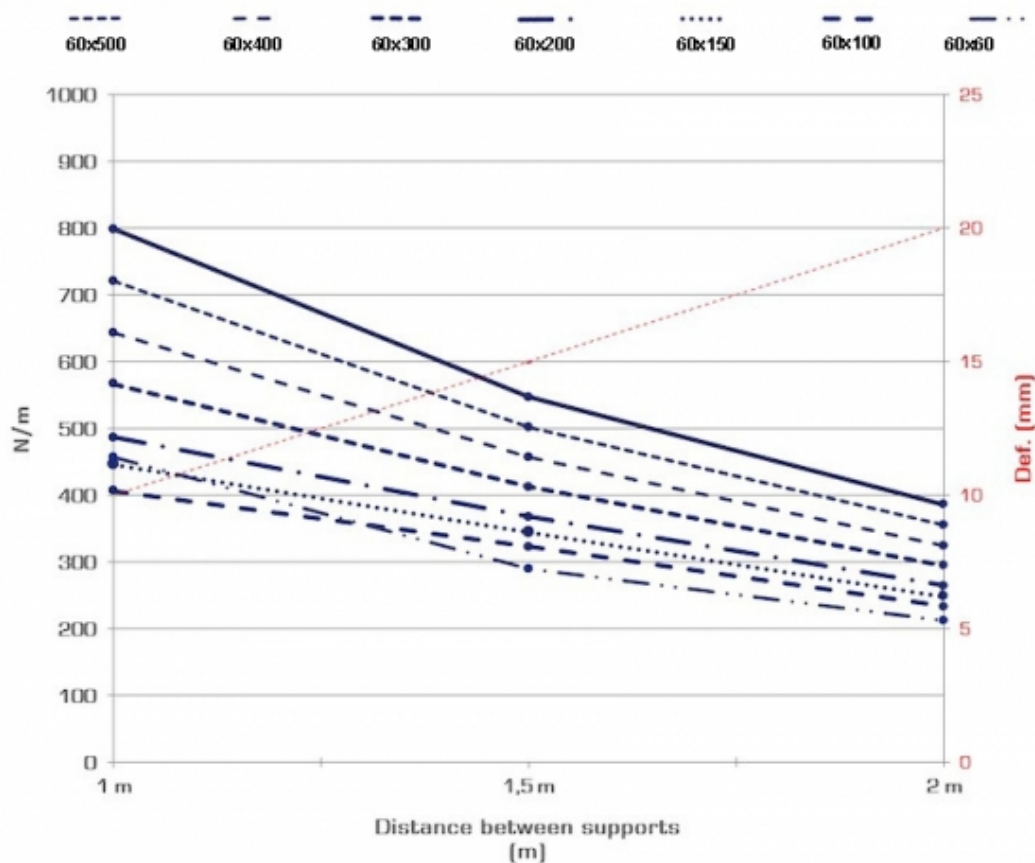

y= Max load (N/m)

x= Distance between supports (m)