


Joint plate



Available in heights (H):

50

75

100

Dimension		Thickness	Weight	Technical Info	Code
H		[mm]	[Kg]	a w (b) L I d	
50	01	1,50	0,04	35 52 - - -	T0 200 0005

H.50 - Joint plate with threaded pins

To be installed also with item T0 053 - H.50 -

Cable tray for motorway tunnels

H.75/100 - Joint plate with movable screws

Certifications



E471266



List of Coatings

Galvanization (Sendzimir method) - UNI EN 10346

Certified System


- IMQ
- EN 61537-1 ed.2007
- EN 50085-1:2005 ed EN 50085-2-1:2006
- UL file E471266

Attention: for ZT and ZM material sold/assembled in U.S.A. and Canada, please require UL mark

Joint plate

Applications

Our movable screw joint system is extremely useful. It is a great innovation that combines quick assembly and equipotential connection of the elements of the ZT system. Inside the trunking, the heads of the bolts are recessed and protected by a plate (1) which makes it possible to pull electric cables without fear of damaging them.

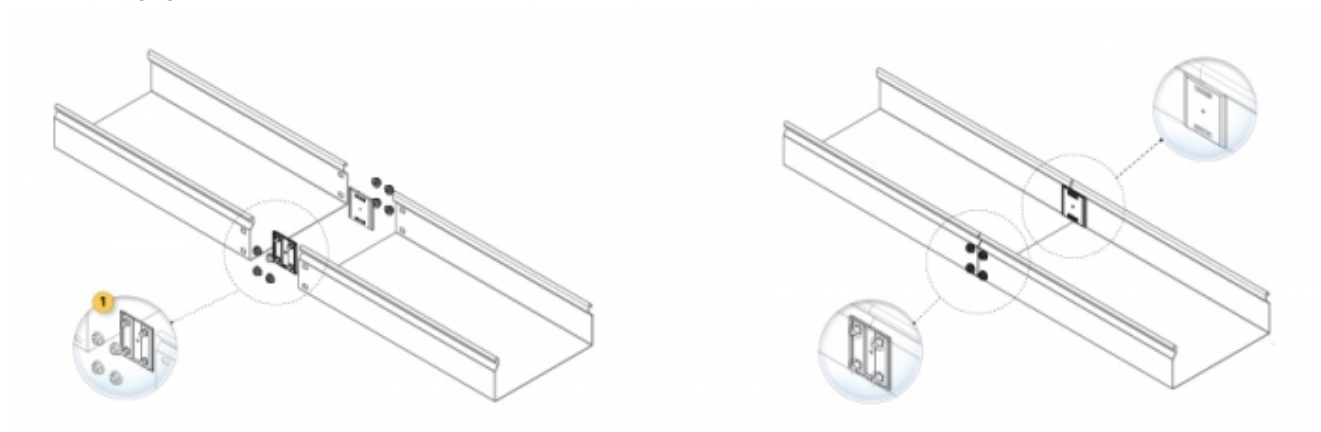

Joint plate

Assembly

 n. 2 M6 **TO 621 0600** *included*