


Joint plate



Available in heights (H):

- 50
- 75
- 100

Dimension	Thickness	Weight	Technical Info	Code
H	[mm]	[Kg]	a w (b) L l d	
75	01	-	0,04 47 53 26 35 M6	T0 200 0007

**H.50** - Joint plate with threaded pins

To be installed also with item T0 053 - H.50 - Cable tray for motorway tunnels

**H.75/100** - Joint plate with movable screws

Certifications




List of Coatings
Galvanization (Sendzimir method) - UNI EN 10346

Certified System
- IMQ
- EN 61537-1 ed.2007
- EN 50085-1:2005 ed EN 50085-2-1:2006
- UL file E471266
Attention: for ZT and ZM material sold/assembled in U.S.A. and Canada, please require UL mark

## Joint plate

### Applications

Our movable screw joint system is extremely useful. It is a great innovation that combines quick assembly and equipotential connection of the elements of the ZT system. Inside the trunking, the heads of the bolts are recessed and protected by a plate (1) which makes it possible to pull electric cables without fear of damaging them.

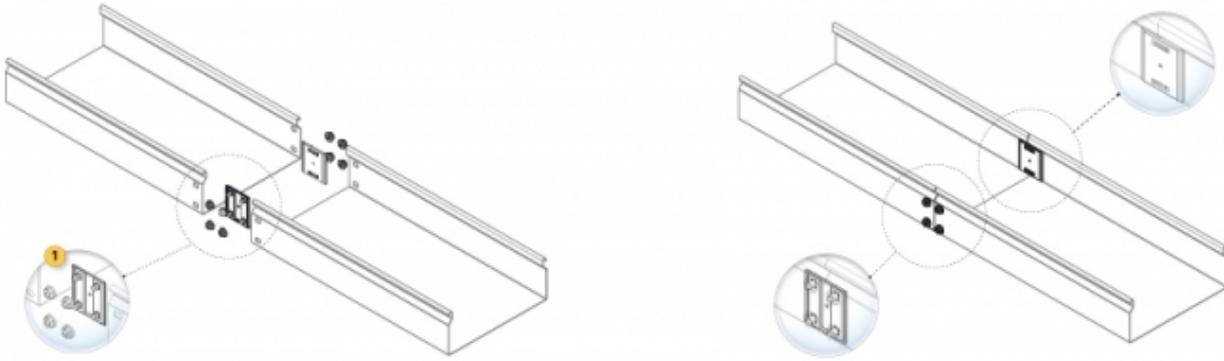

# Joint plate

## Assembly

n. 4 M6 TO 621 0600 *included*

[See the video](#)

