


Inside "U" joint

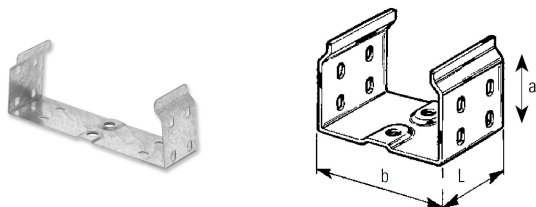

T0 203 0515

Length: 0

Coatings

- 01 Galvanization (Sendzimir method) - UNI EN 10346
- 03 Hot dip galvanizing - UNI EN ISO 1461
- 11 Grey RAL 7032 - ISO9227-ISO6270-ISO2810
- 15 Blue RAL 5015 - ISO9227-ISO6270-ISO2810
- 40 Stainless steel AISI 304 - UNI EN 10088

Technical Characteristics

Dimension

W (B) 150

Weight

[Kg] 0,15

Technical Info

a 45

w (b) 147

L 52

Certified System

- IMQ
 - EN 61537-1 ed.2007
 - EN 50085-1:2005 ed EN 50085-2-1:2006
 - UL file E471266
- Attention: for ZT and ZM material sold/assembled in U.S.A. and Canada, please require UL mark

Certifications




Inside "U" joint

Assembly

H50		n. 4 M6x10 / M6x12	T0 620 0610 / T0 620 0612
		n. 4 M6	T0 621 0600
H75-100		n. 8 M6x10 / M6x12	T0 620 0610 / T0 620 0612
		n. 8 M6	T0 621 0600

Not included



In the case of the installation of internal "U" joints on painted items, preparation with equipotential plates is required.