

Hinged Cable tray IP40

- T4 WITH equipotential connection
- T3 WITHOUT equipotential connection (N°3)



T4 003 0505

Length: 3000

Coatings

- 01 Galvanization (Sendzimir method) - UNI EN 10346
- 15 Blue RAL 5015 - ISO9227-ISO6270-ISO2810

Technical Characteristics	
Dimension	
W (B)	50
Thickness	
[mm]	0,60
Weight	
[Kg/m]	1,18
Geometrical section	
[cm ²]	21,25
Conductor section	
[mm ²]	100,80
Hinge quantity	
T0 601	1
T0 602	2

Certifications



T0 601 Hinge without equipotential connection

T0 602 Hinge with equipotential connection


Upon request:

- 03 Hot dip galvanized
- 11 Grey RAL 7032 varnished
- 40 Stainless steel AISI 304



Hinged Cable tray IP40

Applications

Our ZT system is preset for hinged covers, allowing frequent inspections without removing the cover. The hinge is a Zamet patent. It is easy to install also after installing the trunking system. We are able to supply hinges with special copper earthing plait for an equipotential connection between trunking and cover.

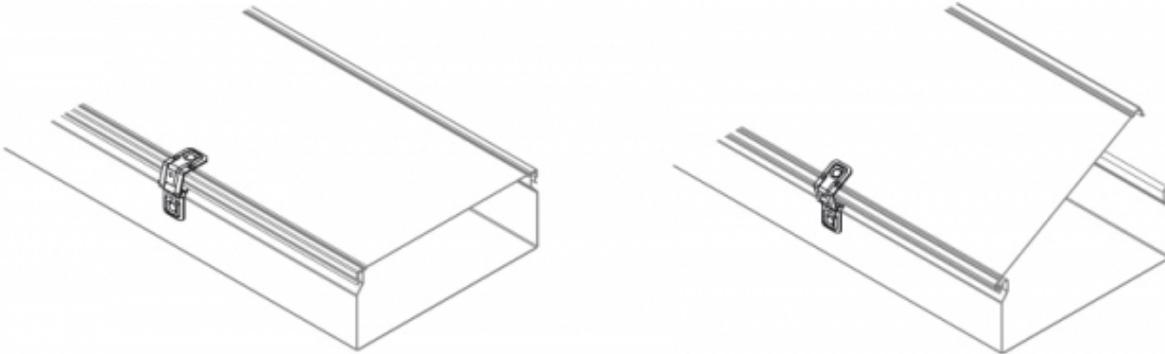

Upon request, we are able to supply hinged trunking, with hook clamps (cod. TO 610) (1) fixed by the hinges.

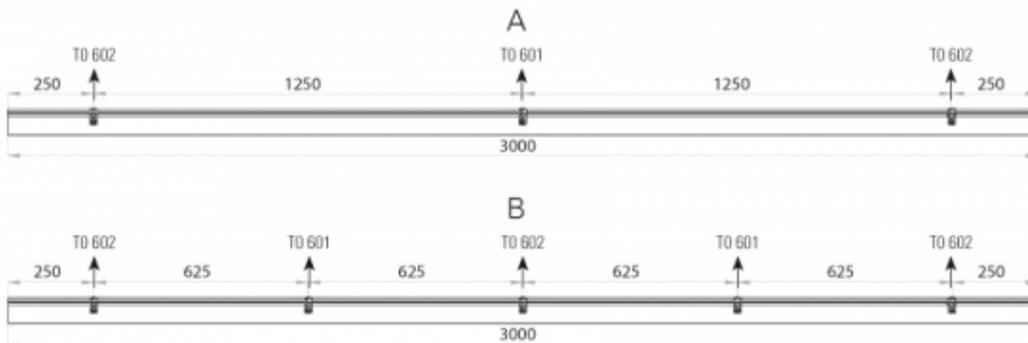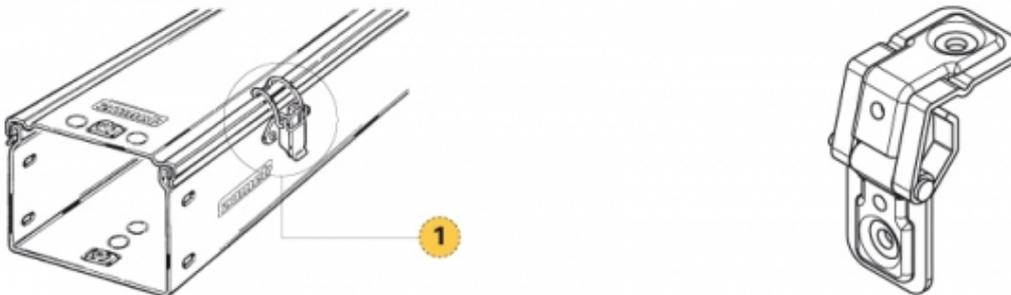

Hinge Assembly installation scheme

Tipo A: H 50-75-100 sino alla B.300

Tipo B: H 50-75-100 sino alla B.400