

Hinged perforated cable tray IP20



Available in heights (H):

- 50
- 75
- 100

Dimension	Thickness	Weight	Geometrical section	Conductor section	Hinge quantity	Code
W (B)	[mm]	[Kg/m]	[cm ²]	[mm ²]	T0 601 T0 602	
50	01 15	0,60 1,16	21,25	100,80	1 2	T4 013 0505
100	01 15	0,60 1,62	45,85	130,80	1 2	T4 013 0510
150	01 15	0,60 2,06	70,03	160,80	1 2	T4 013 0515
200	01 15	0,80 2,95	94,53	254,40	1 2	T4 013 0520
300	01 15	0,80 3,95	142,82	334,40	1 2	T4 013 0530
400	01 15	1,00 5,73	191,62	518,00	2 3	T4 013 0540
500	01 15	1,00 7,70	240,42	618,00	2 3	T4 013 0550
600	01 15	1,20 10,02	289,22	859,20	2 3	T4 013 0560

T0 601 Hinge without equipotential connection

T0 602 Hinge with equipotential connection

Upon request:

- 03 Hot dip galvanized
- 11 Grey RAL 7032 varnished
- 40 Stainless steel AISI 304

Certifications



List of Coatings
Galvanization (Sendzimir method) - UNI EN 10346
Blue RAL 5015 - ISO9227-ISO6270-ISO2810

System NOT Certified


Hinged perforated cable tray IP20

Applications



Our ZT system is preset for hinged covers, allowing frequent inspections without removing the cover.

The hinge is a Zamet patent. It is easy to install also after installing the trunking system.

We are able to supply hinges with special copper earthing plait for an equipotential connection between trunking and cover.

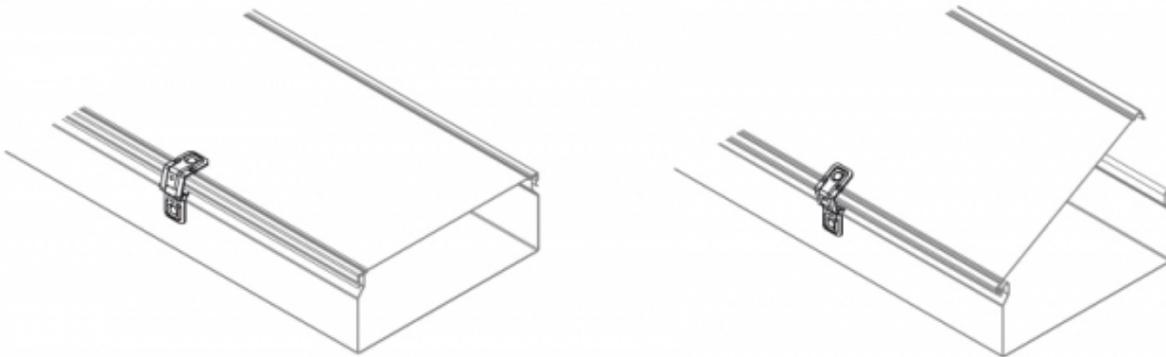

Upon request, we are able to supply hinged trunking, with hook clamps (cod. TO 610) (1) fixed by the hinges.

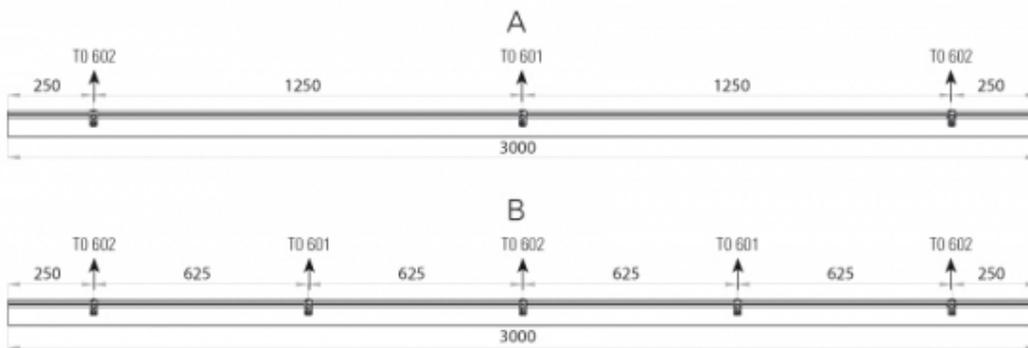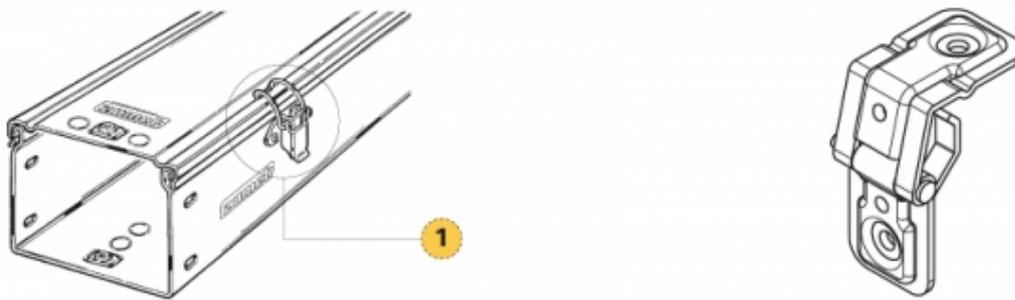

Hinge Assembly installation scheme

Tipo A: H 50-75-100 sino alla B.300

Tipo B: H 50-75-100 sino alla B.400