


## Kit per ermeticizzazione IP44



Disponibile nelle altezze (H):

50

75

100

| Dimensione |  |    |    | Peso | Guarnizione in gomma autoestinguente |                  | Codice      |
|------------|-----------------------------------------------------------------------------------|----|----|------|--------------------------------------|------------------|-------------|
| B          |                                                                                   |    |    | [Kg] | (mt) T1 680 0520                     | (mt) T1 680 0310 |             |
| 50         | 01                                                                                | 11 | 15 | 0,30 | 0,06                                 | 0,17             | T2 203 0505 |
| 100        | 01                                                                                | 11 | 15 | 0,39 | 0,11                                 | 0,22             | T2 203 0510 |
| 150        | 01                                                                                | 11 | 15 | 0,47 | 0,17                                 | 0,28             | T2 203 0515 |
| 200        | 01                                                                                | 11 | 15 | 0,55 | 0,22                                 | 0,33             | T2 203 0520 |
| 300        | 01                                                                                | 11 | 15 | 0,72 | 0,33                                 | 0,44             | T2 203 0530 |
| 400        | 01                                                                                | 11 | 15 | 0,88 | 0,44                                 | 0,55             | T2 203 0540 |
| 500        | 01                                                                                | 11 | 15 | 1,05 | 0,55                                 | 0,66             | T2 203 0550 |
| 600        | 01                                                                                | 11 | 15 | 1,21 | 0,66                                 | 0,77             | T2 203 0560 |

Utilizzare il cod:

**T1 680 - Guarnizione in gomma per kit IP44**

**T1 680 0520 32 - 20mt.**

**T1 680 0310 32 - 25mt.**

Certificazioni



E471266



Legenda Trattamenti

Zincato Sendzimir - UNI EN 10346


Grigio RAL 7032 - ISO9227-ISO6270-ISO2810

Blu RAL 5015 - ISO9227-ISO6270-ISO2810

## Kit per ermeticizzazione IP44

### Applicazioni

Il sistema ZT può essere ermeticizzato IP44 utilizzando il previsto KIT (T2 203)

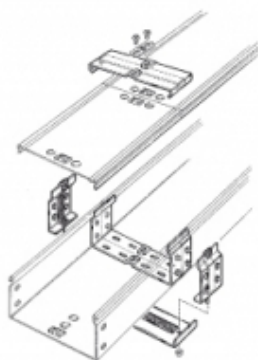

Componente a richiesta